

## DISINFECTION GATE 360°

- WATER CONSUMPTION: from 30 l/min up to 110l/min
- Chemical solution consumption (water + chemicals)
   11l-35l/track
- DISINFECTION TIME: 15-25 sek/ truck
- **DISINFECTION FRAME:** powder coated aluminum
- Stainless or PVC spraying system
- 9 13 nozzles undercarriage spraying system
- Equipped with a 230V or 400V powered pump
- Automatic chemical dilution
- 33 48 pcs spray nozzles, different types
- 25m hose for spraying in inaccessible spots
- REMOTE CONTROL: start/stop function
- VEHICLE DETECTORS AND REMOTE CONTROLLERS:
   Automatic start/stop function Vehicle detectors and remote controllers
- Manual start push button
- **HEATING:** a heating system with built-in thermostat that starts heating when the temperature drops below 0°C
- **STORAGE:** Component Storage keeps inside pumps, chemical containers, control panel, dilution systems, etc.
- LARGE STORAGE: Component Storage keeps inside 600l clean water tank, pumps, chemical containers, control panel, dilution systems, etc.
- Night visibility elements
- **COLOR:** yellow or made to order
- **DIMENSION:** 470cm x 400cm, 470cm x 450cm (can be made with any size)

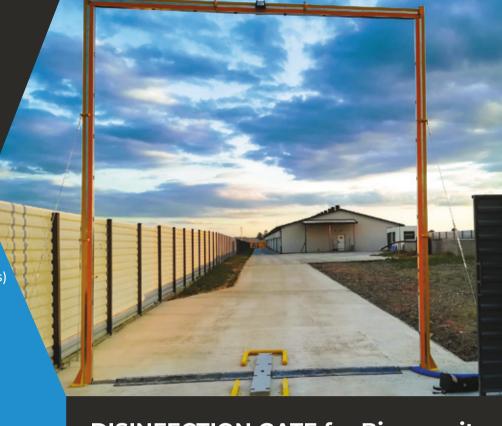

## **DISINFECTION GATE for Biosecurity**

Disinfection Gate for 360 ° vehicle disinfection, design for spraying any type of passing thru vehicles like agricultural machinery, poultry trucks, passenger cars. Prevents the transfer of diseases to the farm, danger zone.

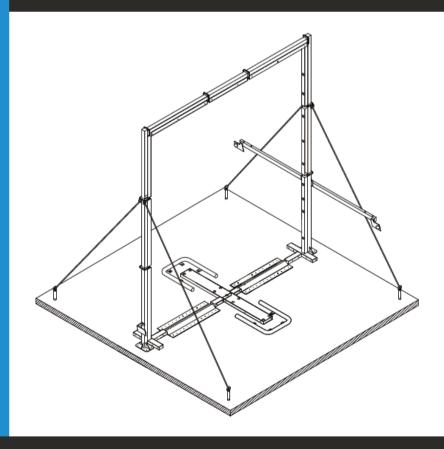

## CHEMICAL DILUTION RATE

Tip No.	1	2	3	4	5	6		7	8	9	10	11	No Tip
% solution	0,3	0,5	0,8	1	1,3	1,5	1,5	2	2,5	3	5	7	14